



SOLARTECH[®]
POWER, INC.


N-Series 65W PV Module SPM065P-N

Solartech N-Series Modules

Solartech photovoltaic N-Series Modules are constructed with high efficient polycrystalline solar cells and produce higher output per module than others in its class. This industrial grade module is an industry standard among various industry professionals.

Features

- Accessible junction box with 2 MC4 style 3ft leads for ease of installation.
- (EVA) with TPT cushions the solar cells within the laminate and ensures the operating characteristics of the solar cells under virtually any climatic condition
- Rigid anodized aluminum frame and low iron tempered glass
- Easily accessible grounding points on all four corners for fast installation
- Proven junction box technology

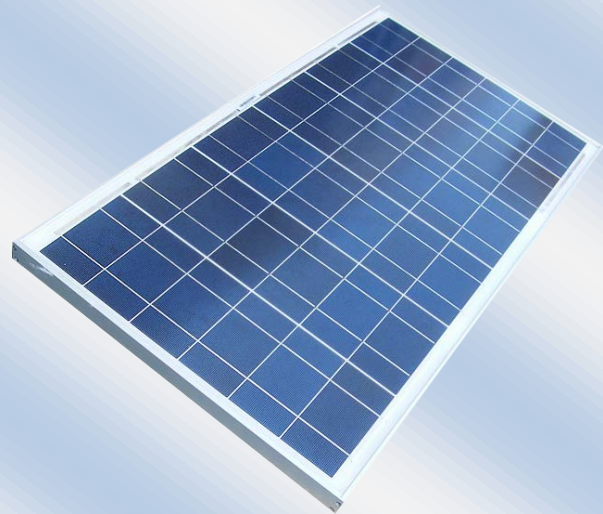

Reliability

- Proven superior field performance
- Tight power tolerance

Qualifications and Certifications



UL No.: E330673 TUV No.:0000022551 IEC No.:C1-ASN07001 ETL No.:4001057

Applications

- Traffic & Safety
- Federal Government
- Agricultural
- Security
- Telecommunications
- Water and Wastewater
- Weather & Environmental Monitoring
- RV Camper
- Emergency Power
- Telemetry
- SCADA, RTU, GPS
- Marine
- Area Lighting & Sign
- Wi-Fi & Wi=Max
- Fence & Gate



Electrical Characteristics

Max power(Pm)	65W
Maximum power voltage(Vpm)	18.1V
Maximum power current (Ipm)	3.69A
Short circuit current (Isc)	3.9A
Open circuit voltage (Voc)	22.0V
Module efficiency	12.19%
Tolerance	±5%
Nominal Voltage	12V
Temperature coefficient of Voc	-0.36%/K
Temperature coefficient of Pm	-0.46%/K
Temperature coefficient of Isc	0.05%/K
NOCT	48°C ± 2°C
Maximum series fuse rating	12A
Maximum system voltage	1000V

Mechanical Characteristics

Construction	Tempered glass, silicon cell, EVA, Polyester with Tedlar
Solar Cells	36 cells (156mm x 78mm) in a 6x6 matrix connected in series
Front Cover	High transmission 3.2mm(1/8") glass
Encapsulant	EVA(Double layers)
Back Cover	White polyester
Frame	Anodized aluminum
Junction Box	IP65, UL94-5VA material
Diodes	Schottky by-pass diodes
Dimensions	38.9in(987mm)x21.3in(540mm)x1.38in(35mm)
Weight	15.4lb (7.0kg)
Operating Temperature	-40°C~90°C
Storage Humidity	<90%

IV Curves

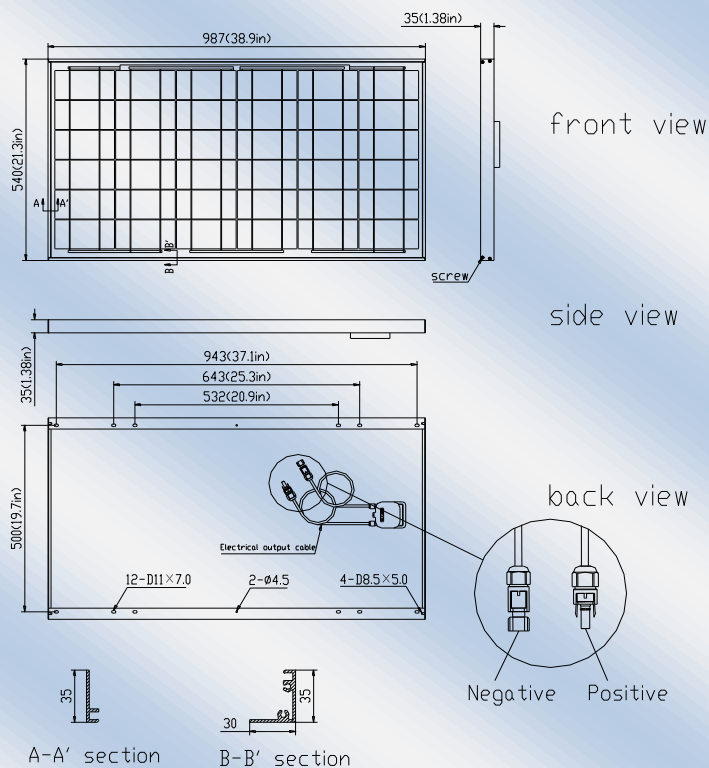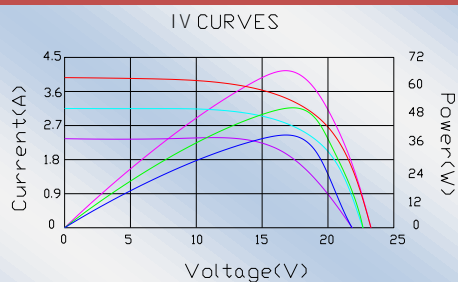

Warranty

25-year limited warranty of 80% power output;
12-year limited warranty of 90% power output;
5-year limited warranty of materials and workmanship

Certifications

IEC61215, TUV certification
UL 1703 certification

*Subject to simulator measurement uncertainty of +/- 5%.

Solartech Power, Inc. reserves the right to modify these specifications without notice.
For more detailed specifications, visit www.solartechpower.com